


Device Dimensions



mm		
	mm	Tolerances
X	3.505	+0.000 -0.025
Z	1.820	+0.000 -0.025
MX	1.549	+0.025 -0.025
MZ	1.499	+0.025 -0.025
ma	0.462	+0.001 -0.001
mb	0.600	+0.003 -0.003
mc	0.369	+0.001 -0.001
md		+0.001 -0.001
m:		+0.002 -0.002
tx	0.978	+0.013 -0.013
t:	0.161	+0.013 -0.013
m:	NA	NA
arcS	NA	NA

Inches		
	mils (0.001")	Tolerances
X	138.00	+0.00 -1.00
Z	71.65	+0.00 -1.00
MX	61.00	+1.00 -1.00
MZ	59.00	+1.00 -1.00
ma	18.18	+0.05 -0.05
mb	23.62	+0.10 -0.10
mc	14.54	+0.05 -0.05
md		+0.05 -0.05
m:		+0.08 -0.08
tx	38.50	+0.5 -0.5
t:	6.34	+0.5 -0.5
m:	NA	NA
arcS	NA	NA

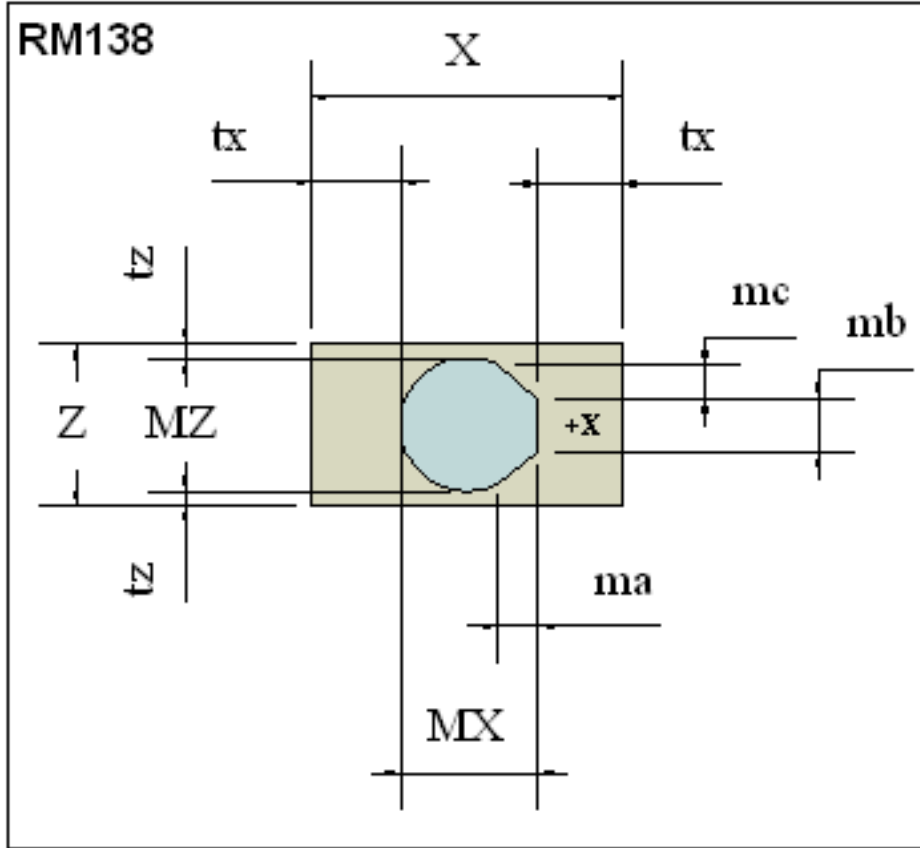